

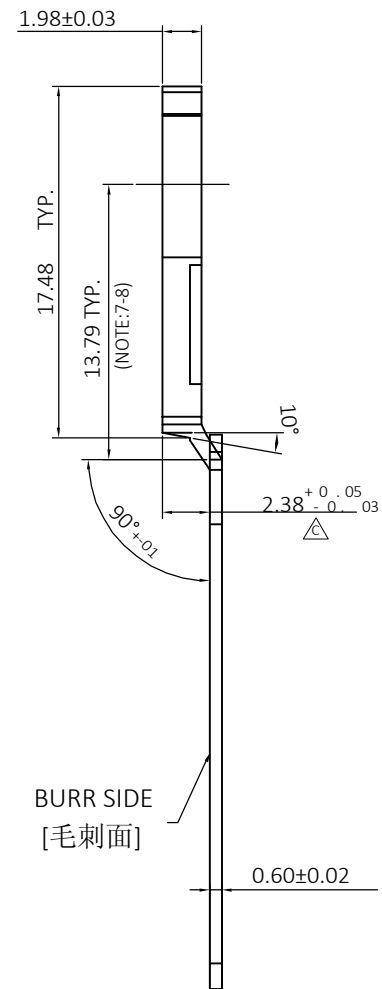
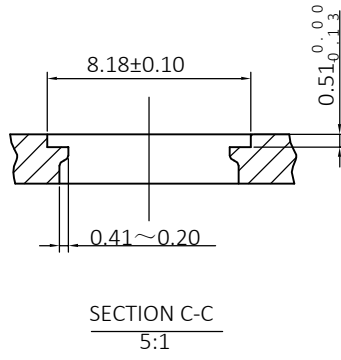


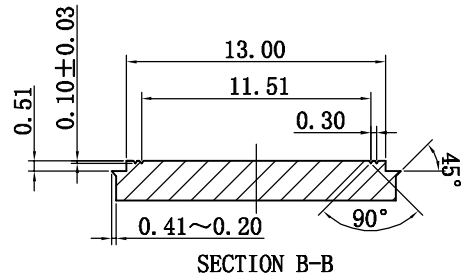

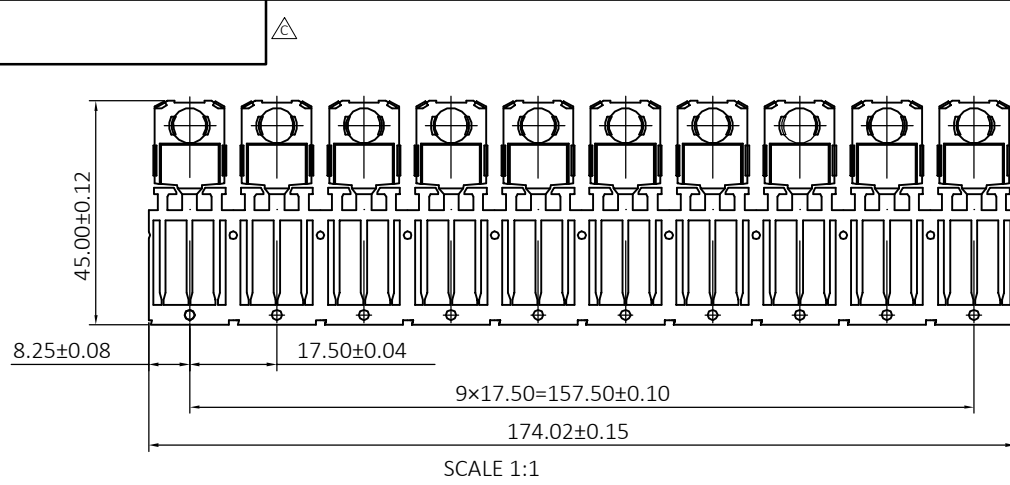

NOTE:
1. TOLERANCE OF ±0.051 UNLESS OTHERWISE SPECIFIED

2. STANDARD RADIUS: RMAX=0.254.

3. COIL SET : MAX 0.508.

4. CROSS BOW : MAX 0.254.


5. STRIP TWIST : MAX 0.254.

6. CAMBER MAX 0.254.


7. BURRS VERTICAL UP TO 0.038 ARE ACCEPTABLE.

8. FLATNESS DOES NOT INCLUDE BURRS.

9. THIS SURFACE TO BE COINED FLAT WITHIN 0.025 TOTALLY.

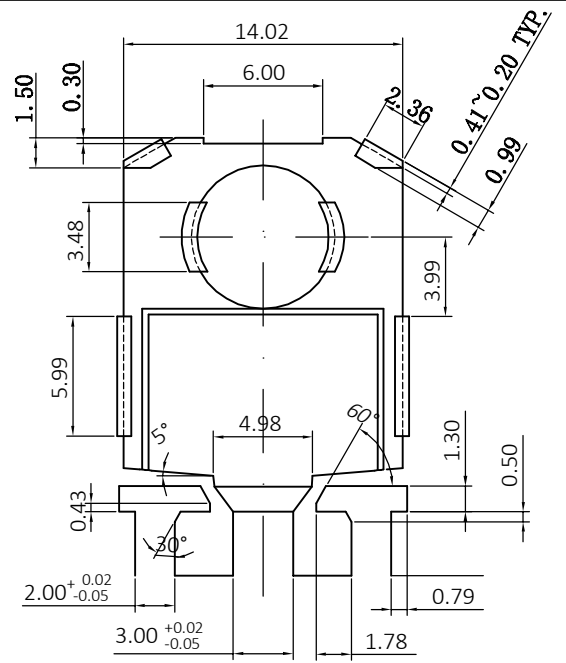

DETAIL A
[详图 A]

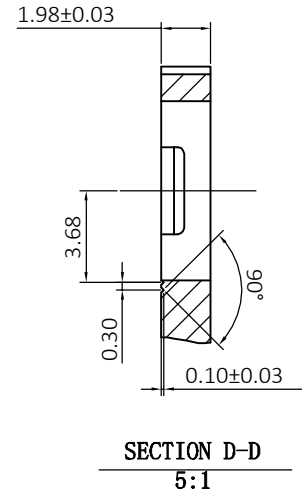

FORMER EDITION

B

EDITION

C

DATE

SIGNER

REVISION	QTY	REV NO.	SIGNER	DATE
DRAWN BY				
CHK'D BY				
PROCESS				
STANDARD				
APPROVED BY				


TO-3PA
LEADFRAME

MATERIAL

VIEW ORIENTATION

UNIT

SCALE



MMMM:1

THE NO: 3

TOTAL: 3